

CHALLENGER  
DFG-ZCseries

## 由川田创作的“完全清洁系统”

Produced by KAWATA widely Recognized for Its "TOTAL CLEAN SYSTEM"

## 省能源 30% (本公司比)

## Saves 30% of Energy (Compare to Our Own Dryer)

- 采用DFG-Z省能方法实施
- Principle of Saving Energy Refers to DFG-Z



## 使用高性能过滤器，防止异物混入

## HEPA Filter

- 在输送、干燥回路上安装了高性能的过滤器(0.3μm×99.97%)，形成了完全封闭的循环系统，可以完全防止污染的产生
- HEPA filters (Efficiency 99.97% at 3 microns) both in the drying and conveying circuits (closed-loop system) prevent contamination

## 采用新型沸石蜂巢转子

## New Corrugated Honeycomb

- 由于采用高性能特殊制作法，基材内部采用沸石设计，可得到-40°C 低露点空气
- 很容易对高温空气进行脱湿
  - 与其他吸湿材不同，即使在100°C的情况下，吸湿能力也非常出色
- 具有寿命长且稳定的脱湿能力
  - 沸石结晶会产生微孔结构，可以降低因高温引起的劣化，将除湿效率下降现象减少到最低
  - 蜂巢转子构造可以节省能源并降低压力损失
- Even the inside of the honeycomb element is supported by zeolite, producing lower dew point air (-40°C)
- The zeolite as a desiccant has high absorption efficiency even in dehumidifying the high temperature air of 100°C and the air of low humidity
- Long service life and stable dehumidifying capacity
  - Crystalline zeolite has a microporous structure, reducing heat deteriorate and minimizing a decline in dehumidifying efficiency
  - Honeycomb structure saves energy and reduces pressure loss



## 料斗

## Hopper

- 一次输送料斗 (输送1)
- 二次输送料斗 (输送2)
  - 在成型机上装有自主研发具有除粉功能的沸腾式料斗，输送材料后，通过空气流动，以去除粉末和异物
- Primary hopper (Convey-1)  
Secondary hopper (Convey-2)
  - Kawata's original "Boiling Power Reduction Hopper", which is mounted on a molding machine, removes resin powder and foreign matter by air flow after conveying.



## 材料配管采用内外抛光洁净管

## Sanitary Pipes for the Material Line

- 输送时由于颗粒磨损会产生粉尘，而配管在连接部也可能产生污染物。为消除这两种危险，用兼有完全密封性和洁清性的内外抛光洁净管作为标准规格进行配备
- Sanitary pipes with excellent sealing performance eliminate the risk of contamination at the junction




## 规格 Specifications

型号/Model	DFG-15ZC-KS	DFG-25ZC-KS	DFG-50ZC-KS	DFG-75ZC-KS	DFG-100ZC-KS	DFG-150ZC-KS
风量/Air flow (m³/h)	28	40	75	125		
露点/Dew point (°C)			-40	※		
干燥温度/Drying temperature (°C)			75~140			
干燥风机容量/Drying blower capacity (50/60Hz)(kW)	0.17/0.28	0.28/0.42	0.55/0.85	1.3/1.9		
再生加热管容量/Regeneration heater capacity (kW)			2.0			
再生风机容量/Regeneration blower capacity (50/60Hz)(kW)			0.09/0.12			
吸湿筒回转马达容量/ Desiccant chamber motor capacity (kW)			0.025			
干燥高精度过滤器(过滤精度)/Dry HEPA filter(filter precision)			0.3μm×99.97%(捕集/Collection)			
有效容量/Effective capacity (L)	25	42	84	125	167	250
干燥量/Feeding volume (kg)	15	25	50	75	100	150
干燥筒内胆材质/Drying hopper inner material			SUS304(镜面/Buffing)			
干燥加热管容量/Drying heater capacity (kW)	2.0	2.4	2.7	4.0		
附属品/Accessories			循环空气输送, 定量输送, 保温付/Circulating air conveying, batch conveying, glass wool insulation			
一次输送料斗(输送1)/Primary hopper (Convey-1)			AL-05			
风机容量/Blower capacity (50/60Hz)(kW)	0.55/0.85			1.3/1.9		
二次输送料斗(输送2)/Secondary hopper (Convey-2)		VL-03NF		VL-05		
风机容量/Blower capacity (50/60Hz)(kW)	0.55/0.85(和一次输送料斗/) Concurrent use of blower with primary conveying)		1.3/1.9(和一次输送料斗/) Concurrent use of blower with primary conveying)			
主断路器容量/Main breaker capacity (380-415/200-220V)(A)	15/32	20/32	20/40	32/50		
总电气容量/Power supply (50/60Hz)(kW)	4.8/5.3	5.3/5.8	6.7/7.6	8.7/9.9		
压缩空气用量/Compressed air requirement (L/min)			5 (0.4 ~ 0.6MPa)(配管口径Φ8/Pipe size Φ8)			
冷却水量/Cooling water volume (L/min)			不要/No need			
附属品/Accessories			电源线/Power supply cable 5m			
涂装色/本体/Frame			日塗工 Y15-85A 半鏡 JPMA Y15-85A, semigloss			
Paint color	電控箱門/Control panel door		日塗工 C69-50T			
机器重量/Weight (kg)	255	266	295	310	330	405

※ 露点根据使用环境有所变动。  
The dew point varies according to ambient air conditions.

## 外形尺寸图 Dimensions

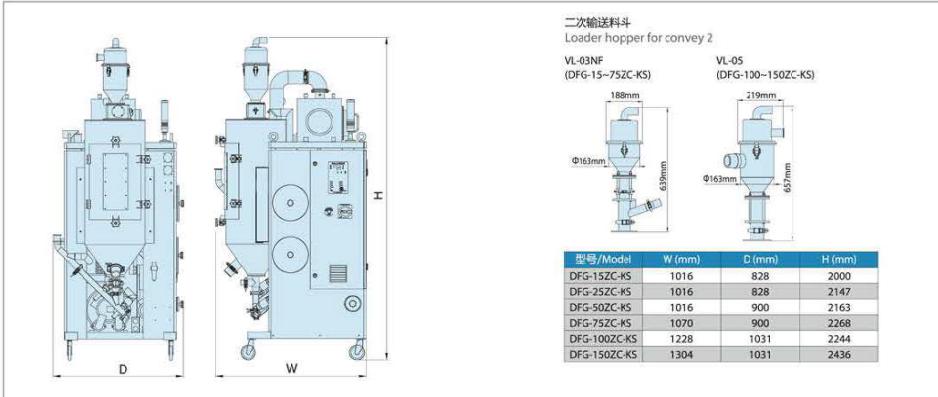

## 选购件 Options

- 旋风分离器/Cyclone separator
- 露点仪/Dew point instrument
- SSR固态继电器/SSR solid state relay
- 主电源漏电开关/Leakage switch of main power
- 输送风机加大/Conveying blower up